



# octopusussy 1412 TWIN



120 Kg =

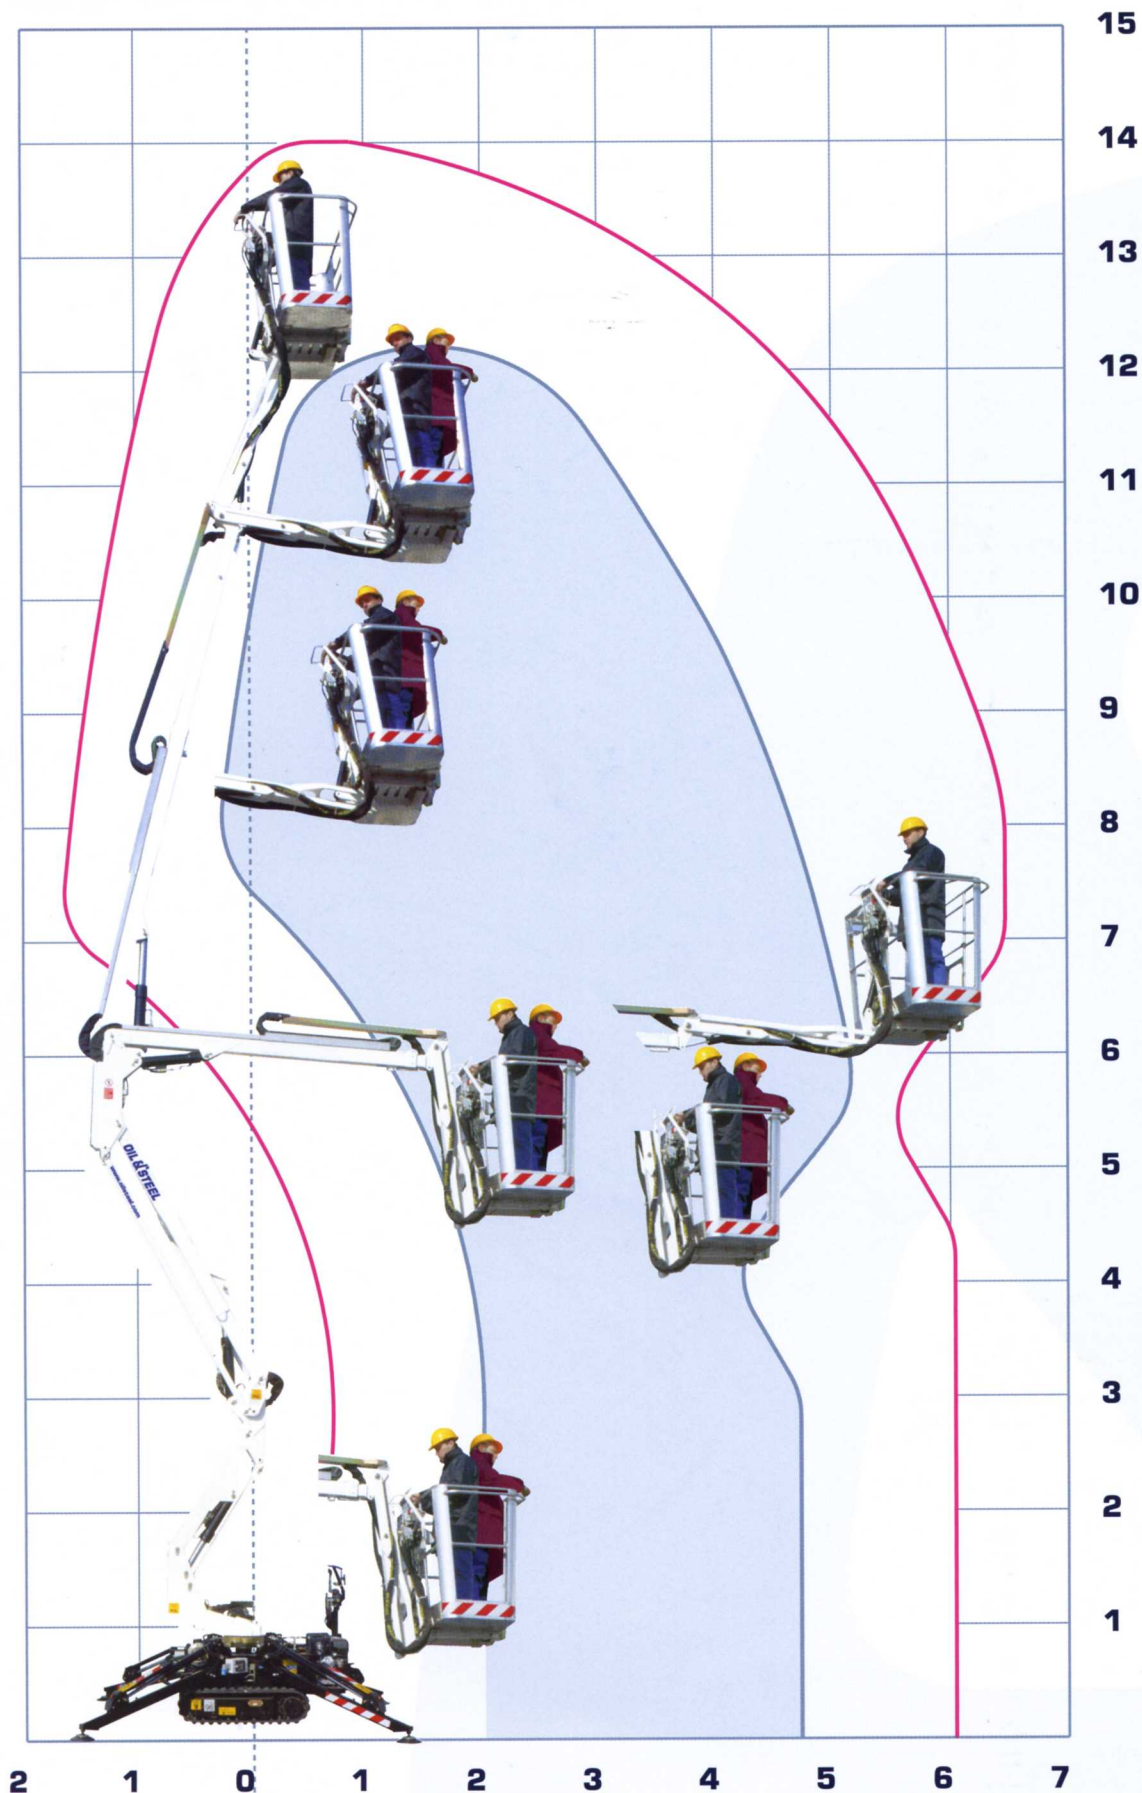

200 Kg =





13,9 m (120 Kg) / 12,3 m (200 Kg)



11,9 m (120 Kg) / 10,3 m (200 Kg)



6,4 m (120 Kg) / 5,7 m (200 Kg)



300°



Asportabile, alluminio, 1400x700xh1100 mm  
 Removable, aluminium, 1400x700xh1100 mm  
 Démontable, aluminium, 1400x700xh1100 mm  
 Alluminio, 1400x700xh1100 mm  
 Abnehmbar, alu, 1400x700xh1100 mm  
 Aluminium, 1400x700xh1100 mm  
 Aluminium, 1400x700xh1100 mm  
 СЪЕМНАЯ - 1400x700x1100 мм АЛЮМИНИЕВАЯ)



Idraulici  
 Hydraulic  
 Hydrauliques  
 Hidráulico  
 Hydraulisch  
 Hydraulisch  
 Hydraulisk  
 ГИДРАВЛИЧЕСКОЕ



120 Kg - 1 operatore / 200 Kg - 2 operatori  
 120 Kg - 1 operator / 200 Kg - 2 operators  
 120 Kg - 1 opérateur / 200 Kg - 2 opérateurs  
 120 Kg - 1 operario / 200 Kg - 2 operarios  
 120 Kg - 1 bediener / 200 Kg - 2 bediener  
 120 Kg - 1 personen / 200 Kg - 2 personen  
 120 Kg - 1 operatører / 200 Kg - 2 operatører  
 120Kg кг - 1 ЧЕЛОВЕК / 200Kg кг - 2 ЧЕЛОВЕКА



1960 mm



4000 mm



780 mm



Ribaltabili a discesa idraulica  
 Collapsible, hydraulic descent  
 Escamotables à descente hydraulique  
 Replegables de bajada hidraulica  
 klappbar mit hydraulisch absenken  
 hydraulisch utvouwbare stempelpoten  
 sammenklappelig, hydraulisk sænkning  
 СКЛАДЫВАЮЩИЕСЯ, ГИДРАВЛИЧЕСКОЕ ОПУСКАНИЕ



Honda monocilindrico silenzioso/elettrico 220V  
 Single-cylinder noiseless honda/electric 220V  
 Honda monocylindrique avec silencieux/electrique 220V  
 Honda monocilindrico silenciado/electrico 220V  
 geräuschloser einzylindermotor, honda  
 geluidsarm honda/electrische 220v  
 et-cylindret støjsvag honda/elektrisk 220v  
 ОДНОЦИЛИНДРОВЫЙ БЕЗШУМНЫЙ ЭЛЕКТРИЧЕСКИЙ 220В



Cingolata 1,5 km/h  
 Tracked 1,5 km/h  
 Sue chenilles 1,5 km/h  
 Oruga 1,5 km/h  
 raupen / 1,5 km/h  
 rups / 1,5 km/h  
 bæltedrevet / 1,5 km/t  
 ГУСЕНИЧНОЕ / 1,5 км/ч



1630 kg

